




2BJ

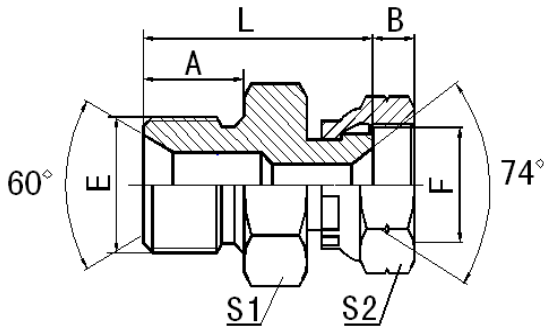

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL / JIC FEMALE 74° SEAT

PART NO.	THREAD		DIMENSIONS						
	E	F			A	B	L	S1	S2
2BJ-02-04Z	G1/8"X28	7/16"X20			10	9.3	24	14	14
2BJ-02-06Z	G1/8"X28	9/16"X18			10	10.5	24.5	14	19
2BJ-04Z	G1/4"X19	7/16"X20			12	9.3	26	19	14
2BJ-04-05Z	G1/4"X19	1/2"X20			12	9.5	26.5	19	17
2BJ-04-06Z	G1/4"X19	9/16"X18			12	10.5	27	19	19
2BJ-04-08Z	G1/4"X19	3/4"X16			12	11	28.5	19	24
2BJ-06Z	G3/8"X19	9/16"X18			13.5	10.5	30.5	22	19
2BJ-06-08Z	G3/8"X19	3/4"X16			13.5	11	32.5	22	24
2BJ-06-10Z	G3/8"X19	7/8"X14			13.5	13	33	22	27
2BJ-08Z	G1/2"X14	3/4"X16			16	11	37	27	24
2BJ-08-06Z	G1/2"X14	9/16"X18			16	10.5	35	27	19
2BJ-08-10Z	G1/2"X14	7/8"X14			16	13	37.5	27	27
2BJ-10Z	G5/8"X14	7/8"X14			17.5	13	37.5	30	27
2BJ-12Z	G3/4"X14	1.1/16"X12			18.5	14.5	42	32	32
2BJ-12-08Z	G3/4"X14	3/4"X16			18.5	11	40	32	24
2BJ-12-10Z	G3/4"X14	7/8"X14			18.5	13	41	32	27
2BJ-12-16Z	G3/4"X14	1.5/16"X12			18.5	16	42	32	41
2BJ-16Z	G1"X11	1.5/16"X12			20.5	16	47	41	41
2BJ-16-20Z	G1"X11	1.5/8"X12			20.5	17	50	41	50
2BJ-20Z	G1.1/4"X11	1.5/8"X12			20.5	16.1	52	50	50
2BJ-20-24Z	G1.1/4"X11	1.7/8"X12			20.5	18.6	53.5	50	60
2BJ-24Z	G1.1/2"X11	1.7/8"X12			23	18.6	56.5	55	60
2BJ-32Z	G2"X11	2.1/2"X12			25.5	23.8	60	70	75


1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	2BJ-08Z
304 stainless steel	SR	2BJ-08SR
316L stainless steel	SV	2BJ-08SV
316Ti stainless steel	SY	2BJ-08SY

2. Plating options and performance for carbon steel connectors.



2BJ

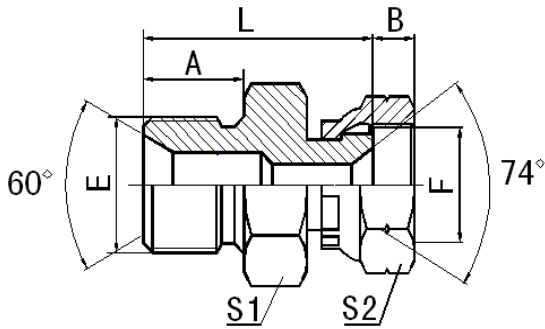

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL / JIC FEMALE 74° SEAT

PART NO.	THREAD			DIMENSIONS				
	E	F		A	B	L	S1	S2
Plating method	Part. No. suffix		Part No. example	White rust (Hours)		Red rust(Hours)		
Cr3+ plating (Default)	Z		2BJ-08Z	96		360		
Durakote plating	ZD		2BJ-08ZD	360		720		
Zinc-nickel plating	ZN		2BJ-08ZN	1000		-		