


90011Y

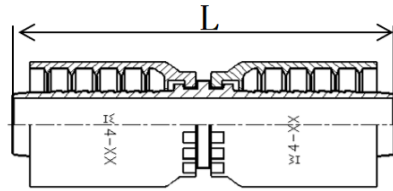

90012Y

DOUBLE CONNECTOR

PART NO.			HOSE SIZE		DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH	L			
90011Y-04Z	-		6	04	69			
90011Y-05Z	-		8	05	69			
90011Y-06Z	90012Y-06Z		10	06	73/87			
90011Y-08Z	90012Y-08Z		12	08	77/91			
90011Y-10Z	90012Y-10Z		16	10	83/97			
90011Y-12Z	90012Y-12Z		20	12	93/110			
90011Y-16Z *	90012Y-16Z *		25	16	114/136			
90011Y1-20Z * +	-		32	20	132			
90011Y-20Z * ++	90012Y-20Z *		32	20	132/153			
90011Y-24Z	90012Y-24Z		40	24	162/170			
90011Y-32Z	90012Y-32Z		50	32	170/178			

- The dimension L before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
- Part no. marked with "*" is recommended.
- Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
- The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
- Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	90012Y-16Z
304 stainless steel	SR	90012Y-16SR
316L stainless steel	SV	90012Y-16SV
316Ti stainless steel	SY	90012Y-16SY

- Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	90012Y-16Z	96	360
Durakote plating	ZD	90012Y-16ZD	360	720
Zinc-nickel plating	ZN	90012Y-16ZN	1000	-